


SOLTA[®] LINER // HOUSE

Liner consisting of a flexible base material suitably coated for the rehabilitation of piping throughout a building

SOLTA[®] LINER HOUSE offers a quality solution for pipe rehabilitation throughout a building. These flexible liners are particularly curve-compliant, they even adapt to abrupt pipe-diameter transitions, thus permitting rapid, time- and cost-saving installation.

- flexible liners for abrupt cross-sectional pipe variations and for the rehabilitation of bends and elbows at laterals
- dry, single-layer liner with different wall thicknesses
- liner with different types of seams, base materials and coatings, curve-compliant for 30°, 60° and 90° pipe bends
- liner for the rehabilitation of gutter pipes
- suitable for several standard resins (user verification is needed)
- easy impregnation and very convenient installation

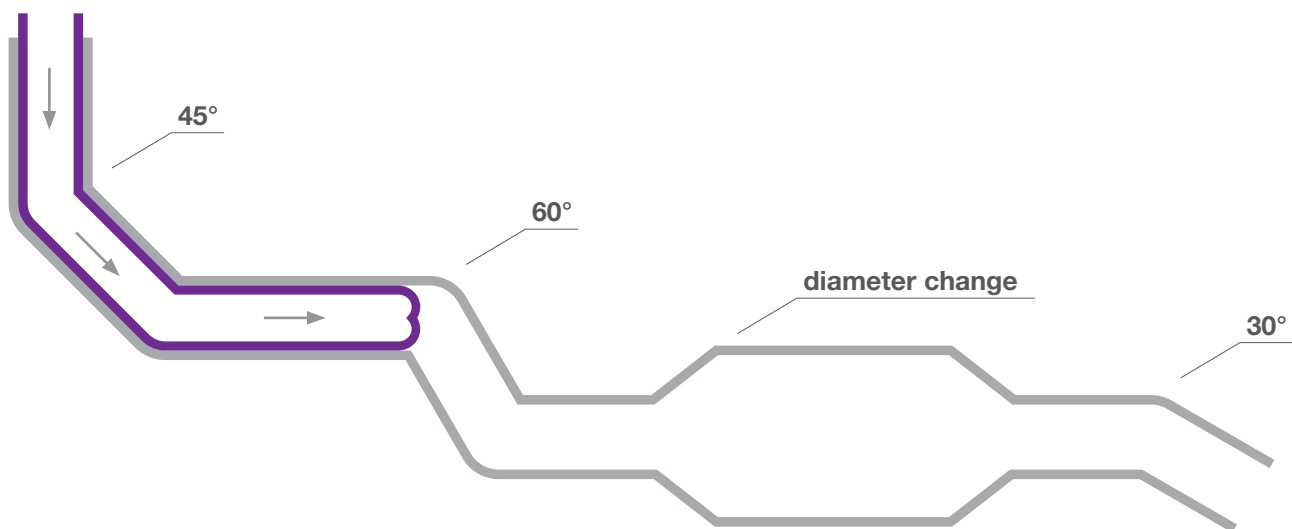

Specifications	
diameters	from DN 50 to DN 300
wall thicknesses	upon request, e. g. 3 mm or 5 mm
coating	upon request
process	INVERSION or PULL IN
curing method	ambient temperature, hot water, steam or UV light
liner which deviate from the standard are available upon request	